

SINGLE-PHASE WET&DRY INDUSTRIAL VACUUM CLEANERS

XM 20 JC

COMPACT INDUSTRIAL VACUUM CLEANER



Guarda il video!



POTENZA
2,6 kW - 3,5 HP



APPLICAZIONE
Fine, dry and clogging
powders



CAPACITA'
20Lt

VANTAGGI

- High filtration capacity and efficiency
- Compact and handy
- Sturdy painted steel construction
- Multiple construction options available

HIGHLIGHTS




SUCTION UNIT

Suction is provided by 2 by-pass motors controlled by independent switches, allowing the operator to control suction performance. The motors are located inside a robust enclosure, with an insulating sponge to maintain a low noise level.



FILTER UNIT

Filtration is ensured by a Class M polyester cartridge filter (filtration efficiency 1 micron) with a high filtering surface area, which guarantees air passage even with a dirty filter.

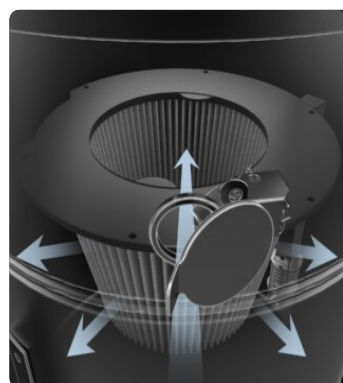

JET CLEAN FILTER CLEANING SYSTEM

Equipped with JetClean® filter cleaning system. Due to the different pressure between the outside and inside of the vacuum cleaner, the system generates a flow of air through the cartridge that detaches dust from the surface of the filter, keeping the filter efficient while working and without stopping suction.



COLLECTION UNIT

The material is collected inside a coated bin complete with a handle that allows its release. Thanks to the 4 sturdy pivoting wheels, the container can be moved with ease, and the collected material can then be disposed of.

TECHNICAL DATA

MOTORE

Tipologie	By-pass
Potenza	2,6 kW - 3,5 HP
Frequenza	50/60 Hz
Voltaggio	230 V
Vuoto in continuo	250 mBar
Massima portata d'aria	380 m3/h
Livello di rumorosità	72 dB(A)

MACCHINA

Bocca aspirante	50 Ø mm
Sistema di raccolta	Steel container
Capacità	20 Lt
Dimensioni	516 x 545 mm
Altezza	994 mm
Peso	38 Kg

FILTRAZIONE

Tipologia filtro primario	Cartridge
Superficie filtrante	35000 cm2
Classe filtrazione EN 60335-2-69	M
Media	Polyester
Sistema Pulizia filtro	Jet Clean
Ghigliottina JetClean	Included

DOTAZIONI



FILTER CLOGGING INDICATOR


Filter clogged or need to be replaced
indicator light



POWER SUPPLY CABLE



SHUKO TYPE PLUG



DEFLECTOR

Internal deflector to protect the filter



WHEEL WITH BRAKE

Non-marking wheel with integrated brake



WHEELS

Non-marking pivoting wheels



STEEL CONSTRUCTION

Rugged industrial coated steel construction



SD

Sliding damper



JC

Jet Clean

OPTIONS

AVAILABLE FILTER MEDIA



HEPA 13

Absolute filter (EN 1822)
35.000 cm² filter surface
H13 Class Filter (EN 1822)
Glass fiber



HEPA 14

Absolute filter (EN 1822)
22.000 cm² filter surface
H14 Class Filter (EN 1822)
Glass fiber

STRUCTURE AND OPTIONS

60^{Hz}

60HZ

Available in 60Hz version



3 YEARS WARRANTY

Purchasing the replacement filter along with the vacuum



RC SCHUKO

Remote control by power tool (MAX 2000 W)



GRD

Grounding



BX

Stainless steel bin AISI 304

ACCESSORIES



P13638

STARTER KIT Ø 40MM

Basic kit containing specific accessories for 40 mm diameter solids and liquids vacuuming



P13640

DRY KIT Ø 40MM

Kit containing specific accessories for 40 mm diameter dust and solids vacuuming