

SINGLE-PHASE WET&DRY INDUSTRIAL VACUUM CLEANERS

XM 20

PORTABLE INDUSTRIAL VACUUM CLEANER



Guarda il video!



POTENZA
2,6 kW - 3,5 HP



APPLICAZIONE
Powders, solids and
shavings



CAPACITA'
20Lt

VANTAGGI


- Compact and maneuverable
- High filtration capacity and efficiency
- Sturdy painted steel construction
- Multiple construction options available

HIGHLIGHTS



SUCTION UNIT

Suction is provided by 2 by-pass motors controlled by independent switches, allowing the operator to control suction performance. The motors are located inside a robust enclosure, with an insulating sponge to maintain a low noise level.

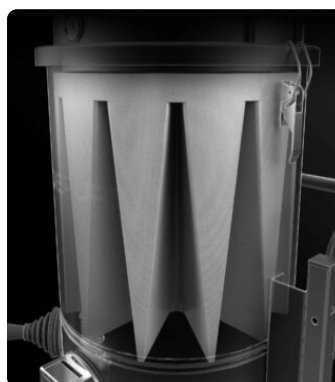

FILTER UNIT

Filtration is provided by a polyester star filter in class M (filtration efficiency 1 micron) with a high filtering surface area, which guarantees the passage of air even with a dirty filter.



FILTER CLEANING SYSTEM

An ergonomic manual filter shaker allows the filter to be cleaned easily and quickly, removing dust and debris from the surface of the filter.



COLLECTION UNIT

The material is collected inside a coated bin complete with a handle that allows its release. Thanks to the 4 sturdy pivoting wheels, the container can be moved with ease, and the collected material can then be disposed of.

TECHNICAL DATA

MOTORE

Tipologie	By-pass
Potenza	2,6 kW - 3,5 HP
Frequenza	50/60 Hz
Voltaggio	230 V
Vuoto in continuo	250 mBar
Massima portata d'aria	380 m3/h
Livello di rumorosità	72 dB(A)

MACCHINA

Bocca aspirante	50 Ø mm
Sistema di raccolta	Steel container
Capacità	20 Lt
Dimensioni	516 x 545 mm
Altezza	994 mm
Peso	38 Kg

FILTRAZIONE

Tipologia filtro primario	Star
Superficie filtrante	15000 cm2
Media	Polyester
Sistema Pulizia filtro	Manual

DOTAZIONI



FILTER CLOGGING INDICATOR

Filter clogged or need to be replaced
indicator light



SHUKO TYPE PLUG



POWER SUPPLY CABLE




WHEEL WITH BRAKE

Non-marking wheel with integrated brake



WHEELS

Non-marking pivoting wheels



DEFLECTOR

Internal deflector to protect the filter



STEEL CONSTRUCTION

Rugged industrial coated steel construction

OPTIONS

AVAILABLE FILTER MEDIA



HEPA 14

Absolute filter (EN 1822)
22.000 cm² filter surface
H14 Class Filter (EN 1822)
Glass fiber



ANT M

Antistatic filter (M class EN 60335-2-69)



MTF

Teflon filter (M class EN 60335-2-69)



NOMEX

250° Celsius resistant filter



PTFE

PTFE Filter (M class EN 60335-2-69)



PTFE ANT

Antistatic PTFE filter (M class EN 60335-2-69)

STRUCTURE AND OPTIONS

60^{Hz}

60HZ

Available in 60Hz version



3 YEARS WARRANTY

Purchasing the replacement filter along with the vacuum



BX

Stainless steel bin AISI 304



GX

Stainless steel bin and chamber AISI 304



GRD

Grounding



RC SCHUKO

Remote control by power tool (MAX 2000 W)

ACCESSORIES



P12350

STARTER KIT Ø 50MM

Basic kit containing specific accessories for 50 mm diameter solids and liquids vacuuming



P11887

WET & DRY KIT Ø 50MM

Kit containing specific accessories for 50 mm diameter solids and liquids vacuuming