

SINGLE-PHASE WET&DRY INDUSTRIAL VACUUM CLEANERS

XM 35 FP LP

INDUSTRIAL VACUUM CLEANER FOR DUST EXTRACTION



POTENZA
2,6 kW - 3,5 HP



APPLICAZIONE
Toxic or hazardous dusts



TIPO DI RACCOLTA
Endless bag

VANTAGGI


- Designed for fine dust in surface treatment applications
- Telescopic frame for easy transportation
- Integrated automatic filter cleaning
- Endless Bag collection to avoid contact with collected dust

HIGHLIGHTS



SUCTION UNIT

Suction is provided by 2 by-pass motors controlled by independent switches, allowing the operator to control suction performance. The motors are located inside a robust enclosure, with an insulating sponge to maintain a low noise level.

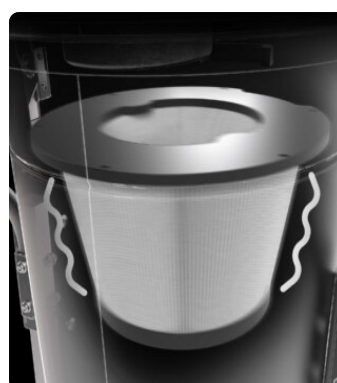

FILTER UNIT

Filtration is ensured by a class M polyester cartridge filter (filtration efficiency 1 micron) with a high filter surface area, which guarantees air passage even with a dirty filter. A vibration cleaning system keeps the filter efficient even during long work sessions.



POWER TOOL SOCKET

A 24VAC outlet allows hand-held power tools to be connected and the remote switching on and off of the vacuum cleaner to be subordinated.



COLLECTION UNIT

The material is collected inside a sturdy 20-meter-long adjustable roll plastic bag. Once the bag is filled, simply seal and remove it, with no contact between operator and material.

TECHNICAL DATA

MOTORE

Tipologie	By-pass
Potenza	2,6 kW - 3,5 HP
Frequenza	50/60 Hz
Voltaggio	230 V
Vuoto in continuo	250 mBar
Massima portata d'aria	380 m3/h
Livello di rumorosità	72 dB(A)
Controllo Remoto	Power tool socket

MACCHINA

Bocca aspirante	50 Ø mm
Sistema di raccolta	Endless Bag
Dimensioni	585 x 545 mm
Altezza	1395 mm
Altezza compatto	1100 mm
Peso	45 Kg

FILTRAZIONE

Tipologia filtro primario	Cartridge
Superficie filtrante	35000 cm2
Classe filtrazione EN 60335-2-69	M
Media	PTFE coated polyester
Sistema Pulizia filtro	Vibro

DOTAZIONI



RC SCHUKO
Remote control by power tool (MAX 2000 W)



FILTER CLOGGING INDICATOR
Filter clogged or need to be replaced
indicator light



POWER SUPPLY CABLE



SHUKO TYPE PLUG



PUSH HANDLE



WHEEL WITH BRAKE
Non-marking wheel with integrated brake



WHEELS
Non-marking pivoting wheels



STEEL CONSTRUCTION
Rugged industrial coated steel construction

OPTIONS

AVAILABLE FILTER MEDIA



HEPA 13
Absolute filter (EN 1822)
35.000 cm² filter surface
H13 Class Filter (EN 1822)
Glass fiber


STRUCTURE AND OPTIONS

60^{Hz}

60HZ
Available in 60Hz version



3 YEARS WARRANTY
Purchasing the replacement filter along with the vacuum



AB
Accessories basket



GRD
Grounding

ACCESSORIES



P13638
STARTER KIT Ø 40MM
Basic kit containing specific accessories for 40 mm diameter solids and liquids vacuuming



P12350
STARTER KIT Ø 50MM
Basic kit containing specific accessories for 50 mm diameter solids and liquids vacuuming



P13640
DRY KIT Ø 40MM
Kit containing specific accessories for 40 mm diameter dust and solids vacuuming



P12348
DRY KIT Ø 50MM
Kit containing specific accessories for 50 mm diameter dust and solids vacuuming