

DUST EXTRACTORS FOR TOXIC AND HAZARDOUS DUSTS

M65 SP LP

INDUSTRIAL VACUUM CLEANER WITH AUTOMATIC CLEANING



POTENZA
3,9 kW - 5,2 HP



APPLICAZIONE
Toxic or hazardous dusts




TIPO DI RACCOLTA
Endless bag

VANTAGGI


- Designed for fine dust extraction
- Compact and easy to connect to other machinery
- Large surface area M-class filter with automatic cleaning SP
- Endless Bag collection to avoid contact with dust

HIGHLIGHTS

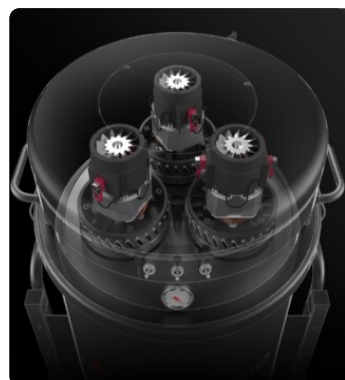

SUCTION UNIT

Suction is provided by 3 by-pass motors operated by independent switches, allowing the operator to control suction performance. The motors are located inside a robust enclosure, with an insulating sponge to maintain a low noise level.

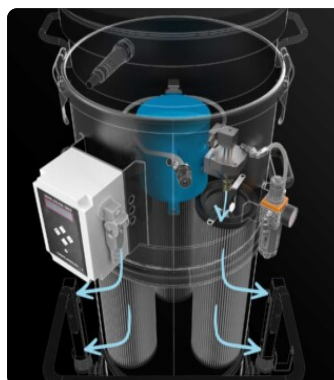

SP FILTER CLEANING SYSTEM

Automatic filter cleaning system in reverse flow of air at 6 bar (compressed air not supplied as standard). Each filter is cleaned at regular, adjustable intervals alternately without interrupting suction. Ideal for fine and difficult dust.



COLLECTION UNIT

The material is collected inside a sturdy 20-meter-long adjustable roll plastic bag. Once the bag is filled, simply seal and remove it, with no contact between operator and material.



COMPRESSOR

System with onboard compressor for proper filter cleaning operation through SP.

TECHNICAL DATA

MOTORE

Tipologie	By-pass
Potenza	3,9 kW - 5,2 HP
Frequenza	50/60 Hz
Voltaggio	230 V
Vuoto in continuo	250 mBar
Massima portata d'aria	570 m3/h
Livello di rumorosità	72 dB(A)


MACCHINA

Bocca aspirante	70 Ø mm
Sistema di raccolta	Endless Bag
Dimensioni	650 X 1100 mm
Altezza	1865 mm
Peso	155 Kg

FILTRAZIONE

Tipologia filtro primario	3x Cartridges
Superficie filtrante	90000 cm2
Classe filtrazione EN 60335-2-69	M
Media	Antistatic polyester
Sistema Pulizia filtro	Automatic SP

DOTAZIONI



DEFLECTOR
Internal deflector to protect the filter



PUSH HANDLE



SHUKO TYPE PLUG



VACUUM GAUGE
Vacuum gauge for indication of filter clogged or in need of replacement



POWER SUPPLY CABLE



WHEEL WITH BRAKE
Non-marking wheel with integrated brake



WHEELS
Non-marking pivoting wheels



STEEL CONSTRUCTION
Rugged industrial coated steel construction



LP
Endless Bag continuous roll collection system



SP
Automatic reverse jet cleaning system



ANTISTATIC FILTRATION
Antistatic filtration to discharge static energy



COM
Compressor on board

OPTIONS

AVAILABLE FILTER MEDIA



HEPA 14

Absolute filter (EN 1822)
22.000 cm² filter surface
H14 Class Filter (EN 1822)
Glass fiber

STRUCTURE AND OPTIONS

60[✓]Hz

60HZ

Available in 60Hz version



3 YEARS WARRANTY

Purchasing the replacement filter along with
the vacuum



CYCLONIC EFFECT

Tangential inlet and cyclone installed
Tangential inlet + cyclone

ACCESSORIES


P10867
IRON REDUCER Ø 70/40MM
 Reducer for vacuum quick fitting in
 galvanised steel 70/40 mm diameter



P10866
IRON REDUCER Ø 70/50MM
 Reducer for vacuum quick fitting in
 galvanised steel 70/50 mm diameter



P13638
STARTER KIT Ø 40MM
 Basic kit containing specific accessories for
 40 mm diameter solids and liquids vacuuming



P12350
STARTER KIT Ø 50MM
 Basic kit containing specific accessories for
 50 mm diameter solids and liquids vacuuming



P13640
DRY KIT Ø 40MM
 Kit containing specific accessories for 40 mm
 diameter dust and solids vacuuming



P12348
DRY KIT Ø 50MM
 Kit containing specific accessories for 50 mm
 diameter dust and solids vacuuming