

DUST EXTRACTORS FOR TOXIC AND HAZARDOUS DUSTS

# M65 SP LP TAN

## INDUSTRIAL VACUUM CLEANER WITH AUTOMATIC CLEANING



**POTENZA**  
3,9 kW - 5,2 HP




**APPLICAZIONE**  
Toxic or hazardous dusts



**TIPO DI RACCOLTA**  
Endless bag

**VANTAGGI**

- Designed for fine dust extraction
- Compact and easy to connect to other machinery
- Large surface area M-class filter with automatic cleaning SP
- Endless Bag collection to avoid contact with dust

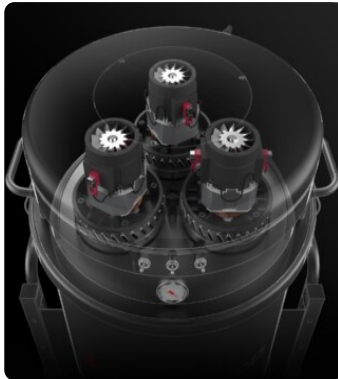**HIGHLIGHTS**

**SUCTION UNIT**

Suction is provided by 3 by-pass motors operated by independent switches, allowing the operator to control suction performance. The motors are located inside a robust enclosure, with an insulating sponge to maintain a low noise level.


**SP FILTER CLEANING SYSTEM**

Automatic filter cleaning system in reverse flow of air at 6 bar (compressed air not supplied as standard). Each filter is cleaned at regular, adjustable intervals alternately without interrupting suction. Ideal for fine and difficult dust.


**COLLECTION UNIT**

The material is collected inside a sturdy 20-meter-long adjustable roll plastic bag. Once the bag is filled, simply seal and remove it, with no contact between operator and material.


**COMPRESSOR**

System with onboard compressor for proper filter cleaning operation through SP.

**TECHNICAL DATA**
**MOTORE**

Tipologie	By-pass
Potenza	3,9 kW - 5,2 HP
Frequenza	50/60 Hz
Voltaggio	230 V
Vuoto in continuo	250 mBar
Massima portata d'aria	570 m3/h
Livello di rumorosità	72 dB(A)


**MACCHINA**

Bocca aspirante	80 Ø mm
Sistema di raccolta	Endless Bag
Dimensioni	650 X 1100 mm
Altezza	1865 mm
Peso	155 Kg

**FILTRAZIONE**

Tipologia filtro primario	3x Cartridges
Superficie filtrante	90000 cm2
Classe filtrazione EN 60335-2-69	M
Media	Antistatic polyester
Sistema Pulizia filtro	Automatic SP

**DOTAZIONI**



**DEFLECTOR**  
Internal deflector to protect the filter



**PUSH HANDLE**



**SHUKO TYPE PLUG**



**VACUUM GAUGE**  
Vacuum gauge for indication of filter clogged or in need of replacement



**POWER SUPPLY CABLE**



**WHEEL WITH BRAKE**  
Non-marking wheel with integrated brake



**WHEELS**  
Non-marking pivoting wheels



**STEEL CONSTRUCTION**  
Rugged industrial coated steel construction



**LP**  
Endless Bag continuous roll collection system



**SP**  
Automatic reverse jet cleaning system



**ANTISTATIC FILTRATION**  
Antistatic filtration to discharge static energy



**COM**  
Compressor on board

**OPTIONS**

**AVAILABLE FILTER MEDIA**



**HEPA 14**  
Absolute filter (EN 1822)  
22.000 cm<sup>2</sup> filter surface  
H14 Class Filter (EN 1822)  
Glass fiber


**STRUCTURE AND OPTIONS**

**60<sup>✓</sup>Hz**

**60Hz**  
Available in 60Hz version



**3 YEARS WARRANTY**  
Purchasing the replacement filter along with the vacuum



**CYCLONIC EFFECT**  
Tangential inlet and cyclone installed  
Tangential inlet + cyclone

**ACCESSORIES**



**P10867**  
**IRON REDUCER Ø 70/40MM**  
Reducer for vacuum quick fitting in galvanised steel 70/40 mm diameter



**P10866**  
**IRON REDUCER Ø 70/50MM**  
Reducer for vacuum quick fitting in galvanised steel 70/50 mm diameter



**P13638**  
**STARTER KIT Ø 40MM**  
Basic kit containing specific accessories for 40 mm diameter solids and liquids vacuuming



**P12350**  
**STARTER KIT Ø 50MM**  
Basic kit containing specific accessories for 50 mm diameter solids and liquids vacuuming



**P13640**  
**DRY KIT Ø 40MM**  
Kit containing specific accessories for 40 mm diameter dust and solids vacuuming



**P12348**  
**DRY KIT Ø 50MM**  
Kit containing specific accessories for 50 mm diameter dust and solids vacuuming