


SUMP VACUUM CLEANERS FOR OIL AND CHIPS

# CLEAN OIL M

## INDUSTRIAL VACUUM CLEANER FOR OIL AND CHIPS



Guarda il video!



**POTENZA**  
2,2 kW - 3 HP




**APPLICAZIONE**  
Oils and lubricants mixed  
shavings

## VANTAGGI

- Filters and reuses lubricating and cutting oils
- Powerful side channel blower with flux inversion for liquid suction and discharge
- Simplified liquid collection and swarf management
- Sturdy painted steel construction

## HIGHLIGHTS

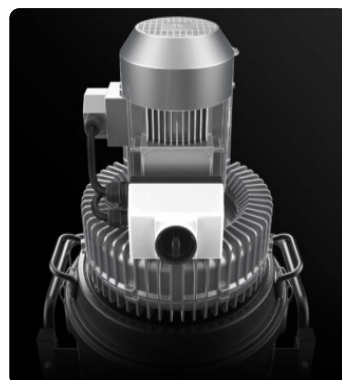


### SUCTION UNIT

The suction unit is a side channel blower with direct coupling between motor and impeller. The turbine is equipped with a safety valve to ensure continuous, maintenance-free operation. A metal silencer is included as standard in the turbine to ensure a low noise level.




### FILTER UNIT

The collected liquid passes through a washable PPL filter with an efficiency of 150µ and a grid basket, which trap chips and simplify their disposal. In this way, even the smallest solid particles can be separated, making the filtered liquid suitable for reuse.

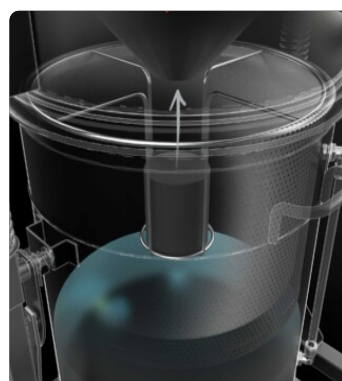

### SAFETY FLOATING DEVICE

A floating device immediately stops suction when the liquid exceeds a certain container fill level protecting the suction unit.

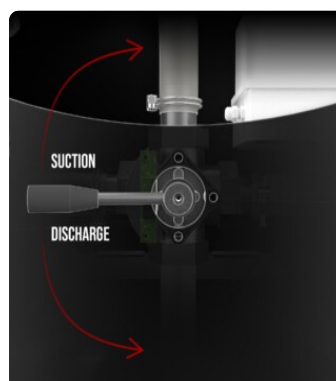

### LIQUID DISCHARGE SYSTEM

A convenient lever, located at the rear of the vacuum cleaner, allows rapid switching between suction and container emptying. The reverse flow system uses the exhaust air from the turbine ensuring the efficiency and speed of the operation.

## TECHNICAL DATA

### MOTORE

Tipologie	Side channel blower
Potenza	2,2 kW - 3 HP
Frequenza	50/60 Hz
Voltaggio	230 V
Vuoto in continuo	180 mBar
Massima portata d'aria	350 m3/h
Livello di rumorosità	74 dB(A)

### MACCHINA

Bocca aspirante	50 Ø mm
Sistema di raccolta	Steel container
Capacità solido	50 lt
Capacità liquido	100 lt
Sistema di scarico liquidi	Reverse flow
Tempo di aspirazione	100/26 lt/sec
Tempo di scarico	100/92 lt/sec
Dimensioni	840 X 710 mm
Altezza	1620 mm
Peso	74 Kg
Separazione solido	Basket grid

### FILTRAZIONE

Tipologia filtro primario	Bag
Media	Polypropylene 150µm

## DOTAZIONI



### OIL-PROOF CARTRIDGE

Oil-proof cartridge for motor protection



### LIQUID LEVEL INDICATOR



### POWER SUPPLY CABLE



### HOSE WITH DISCHARGE VALVE



### PUSH HANDLE



### PLUG

4-pole industrial plug



### HOSE HOOK



### VACUUM GAUGE

Vacuum gauge for indication of filter clogged or in need of replacement



### WHEEL WITH BRAKE

Non-marking wheel with integrated brake



### WHEELS

Non-marking pivoting wheels



### STEEL CONSTRUCTION

Rugged industrial coated steel construction



### GB

Metal grid basket



### FLT

Floater device

## OPTIONS


### STRUCTURE AND OPTIONS



**BX**

Stainless steel bin AISI 304

## ACCESSORIES



**P12354**

**OIL & SWARF KIT PRO Ø 40MM**

Kit containing specific accessories for 40 mm diameter oil and swarf vacuuming application



**P12355**

**OIL & SWARF KIT PRO Ø 50MM**

Kit containing specific accessories for 50 mm diameter oil and swarf vacuuming application



**P12351**

**OIL & SWARF KIT Ø 40MM.**

Basic kit containing specific accessories for 40 mm diameter oil and swarf vacuuming application



**P12352**

**OIL & SWARF KIT Ø 50MM.**

Basic kit containing specific accessories for 50 mm diameter oil and swarf vacuuming application