

SUMP VACUUM CLEANERS FOR OIL AND CHIPS

# CLEAN AIR 2000

## VACUUM CLEANER FOR OILY MISTS



POTENZA  
0,75 kW




APPLICAZIONE  
Oil mist

## VANTAGGI


- 4 stages of progressive efficiency filtration
- High air flow rate for outstanding performance
- Low environmental impact and high energy saving
- Compact and easy to install on any machine tool

## HIGHLIGHTS

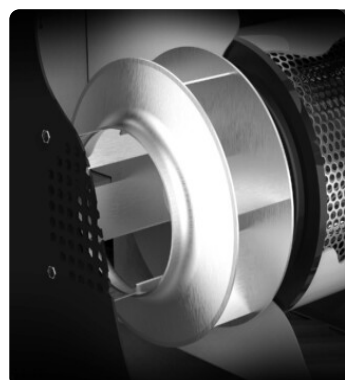

### SUCTION UNIT

A backward-bladed impeller designed to generate a powerful coalescing effect is intended to quietly convey airflow into the vacuum cleaner.

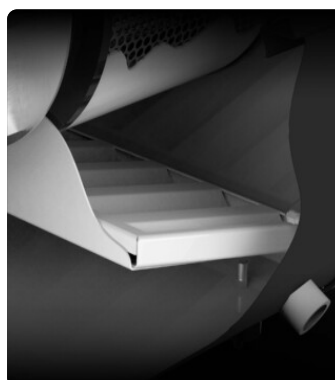


### PRE-FILTERING UNIT

The fluid passes through an effective labyrinth prefilter for the removal of coarse mists.



### FILTER UNIT

A special very high surface area M-class filter cartridge lined with a regenerable coalescing washing mat captures the remaining microneedles.

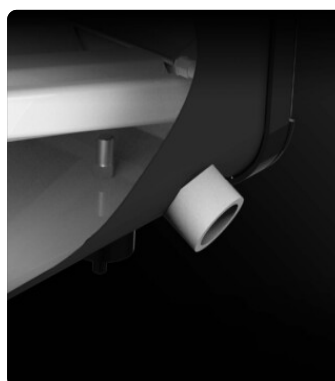

### EXHAUST SYSTEM

The dual recondensed lubricant-coolant drainage system ensures perfect and effective drainage in any application.

## TECHNICAL DATA

### MOTORE

Tipologie	Electric Fan
Potenza	0,75 kW
Frequenza	50/60 Hz
Voltaggio	400 V
Massima portata d'aria	2000 m3/h
Livello di rumorosità	68 dB(A)

### MACCHINA

Bocca aspirante	200 Ø mm
Dimensioni	600 x 1510 mm
Altezza	451 mm
Peso	54 Kg

### FILTRAZIONE

Tipologia filtro primario	Cartridge
Classe filtrazione EN 60335-2-69	M
Media	cellulose

## OPTIONS

### AVAILABLE FILTER CLEANING SYSTEMS



**POST H**  
Post-Cartridge



**PRE H**  
Pre-Cartridge