

SUMP VACUUM CLEANERS FOR OIL AND CHIPS

CLEAN AIR 1200

VACUUM CLEANER FOR OILY MISTS



POTENZA
0,55 kW




APPLICAZIONE
Oil mist

VANTAGGI


- 4 stages of progressive efficiency filtration
- High air flow rate for outstanding performance
- Low environmental impact and high energy saving
- Compact and easy to install on any machine tool

HIGHLIGHTS

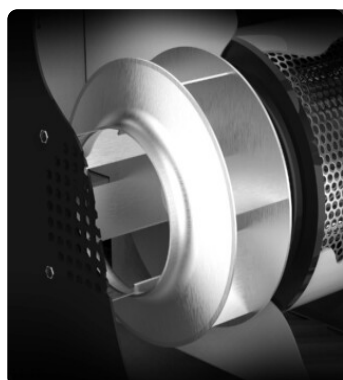

SUCTION UNIT

A backward-bladed impeller designed to generate a powerful coalescing effect is intended to quietly convey airflow into the vacuum cleaner.

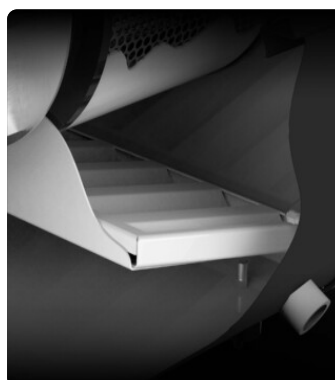


PRE-FILTERING UNIT

The fluid passes through an effective labyrinth prefilter for the removal of coarse mists.



FILTER UNIT

A special very high surface area M-class filter cartridge lined with a regenerable coalescing washing mat captures the remaining microneedles.

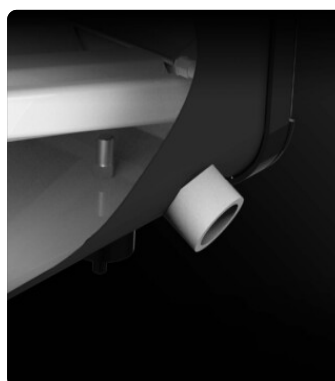

EXHAUST SYSTEM

The dual recondensed lubricant-coolant drainage system ensures perfect and effective drainage in any application.

TECHNICAL DATA

MOTORE

Tipologie	Electric Fan
Potenza	0,55 kW
Frequenza	50/60 Hz
Voltaggio	400 V
Massima portata d'aria	1200 m3/h
Livello di rumorosità	67 dB(A)

MACCHINA

Bocca aspirante	150 Ø mm
Dimensioni	600 x 1510 mm
Altezza	451 mm
Peso	41 Kg

FILTRAZIONE

Tipologia filtro primario	Cartridge
Classe filtrazione EN 60335-2-69	M
Media	cellulose

OPTIONS

AVAILABLE FILTER CLEANING SYSTEMS



POST H
Post-Cartridge



PRE H
Pre-Cartridge