

DUST EXTRACTORS FOR TOXIC AND HAZARDOUS DUSTS

COMBO

INDUSTRIAL VACUUM WITH INTEGRATED PRESEPARATOR



POTENZA
3,9 kW - 5,2 HP



APPLICAZIONE
Toxic or hazardous dusts




TIPO DI RACCOLTA
Endless bag

VANTAGGI


- Industrial vacuum cleaner for fine dust
- Large surface area filter of class M
- Built-in separator to reduce load on primary filter
- Double Endless Bag collection to avoid contact with dust

HIGHLIGHTS

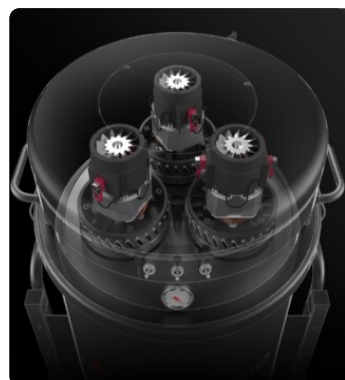

SUCTION UNIT

Suction is provided by 3 by-pass motors operated by independent switches, allowing the operator to control suction performance. The motors are located inside a robust enclosure, with an insulating sponge to maintain a low noise level.

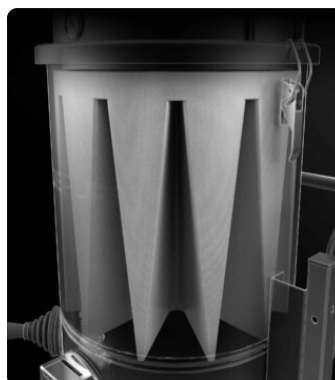

FILTER UNIT

Filtration is provided by a polyester star filter in class M (filtration efficiency 1 micron) with a high filtering surface area, which guarantees the passage of air even with a dirty filter.



BUILT-IN PRE-SEPARATOR

The vacuumed material is collected in a pre-separator integrated with the Endless Bag system. In this way only a small amount of lighter particles pass through the primary filter.



COLLECTION UNIT

The material is collected inside a sturdy 20-meter-long adjustable roll plastic bag. Once the bag is filled, simply seal and remove it, with no contact between operator and material.

TECHNICAL DATA

MOTORE

Tipologie	By-pass
Potenza	3,9 kW - 5,2 HP
Frequenza	50/60 Hz
Voltaggio	230 V
Vuoto in continuo	250 mBar
Massima portata d'aria	570 m3/h
Livello di rumorosità	72 dB(A)

MACCHINA

Bocca aspirante	70 Ø mm
Bocca aspirante in uscita	70 Ø mm
Sistema di raccolta	Endless Bag
Dimensioni	1165 x 665 mm
Altezza	1510 mm
Peso	99 Kg

FILTRAZIONE

Tipologia filtro primario	Star
Superficie filtrante	15000 cm2
Classe filtrazione EN 60335-2-69	M
Media	Polyester
Sistema Pulizia filtro	Manual

DOTAZIONI



VACUUM GAUGE

Vacuum gauge for indication of filter clogged or in need of replacement




POWER SUPPLY CABLE



SHUKO TYPE PLUG



PUSH HANDLE



DEFLECTOR

Internal deflector to protect the filter



WHEEL WITH BRAKE

Non-marking wheel with integrated brake



WHEELS

Non-marking pivoting wheels



STEEL CONSTRUCTION

Rugged industrial coated steel construction



LP

Endless Bag continuous roll collection system

OPTIONS

AVAILABLE FILTER MEDIA



HEPA 14
Absolute filter (EN 1822)
22.000 cm² filter surface
H14 Class Filter (EN 1822)
Glass fiber



PTFE ANT
Antistatic PTFE filter (M class EN 60335-2-69)



ANT M
Antistatic filter (M class EN 60335-2-69)



PTFE
PTFE Filter (M class EN 60335-2-69)



MTF
Teflon filter (M class EN 60335-2-69)

STRUCTURE AND OPTIONS

60^{Hz}

60HZ
Available in 60Hz version



3 YEARS WARRANTY
Purchasing the replacement filter along with the vacuum



GRD
Grounding



RC SCHUKO
Remote control by power tool (MAX 2000 W)

ACCESSORIES



P13638

STARTER KIT Ø 40MM

Basic kit containing specific accessories for 40 mm diameter solids and liquids vacuuming



P12350

STARTER KIT Ø 50MM

Basic kit containing specific accessories for 50 mm diameter solids and liquids vacuuming



P13640

DRY KIT Ø 40MM

Kit containing specific accessories for 40 mm diameter dust and solids vacuuming



P12348

DRY KIT Ø 50MM

Kit containing specific accessories for 50 mm diameter dust and solids vacuuming