

HEAVY DUTY THREE-PHASE INDUSTRIAL VACUUM CLEANERS

PUMA 10 SP

HIGH-POWER INDUSTRIAL VACUUM CLEANER WITH AUTOMATIC CLEANING



POTENZA
7,5 kW - 10 HP



APPLICAZIONE
Fine, dry and clogging
powders




CAPACITA'
175Lt

VANTAGGI

- High performance even in continuous use
- Possibility of vacuuming fine dust in large quantities
- Multiple construction options available
- Can be integrated into centralized vacuum systems

HIGHLIGHTS

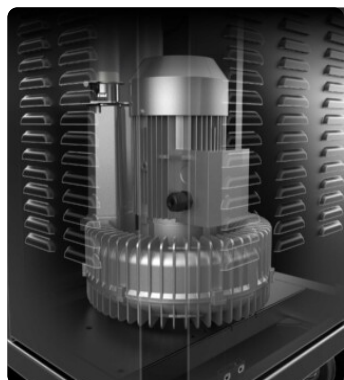


SUCTION UNIT

The suction unit is a side channel blower with direct coupling between motor and impeller. The turbine is equipped with a safety valve to ensure continuous, maintenance-free work. A metal silencer is included as standard in the turbine to ensure a low noise level.



FILTER UNIT

Filtration is ensured by polyester cartridge filters in class M (filtration efficiency 1 micron) with high filtering surface area, which guarantees the passage of air even with dirty filter.

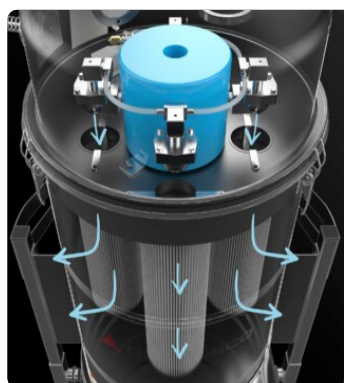

SP FILTER CLEANING SYSTEM

Automatic filter cleaning system in reverse flow of air at 6 bar (compressed air not supplied as standard). Each filter is cleaned at regular, alternately adjustable intervals without interrupting suction. Ideal for fine and difficult dust.



COLLECTION UNIT

The material is collected inside a coated bin complete with a handle that allows it to be released. Thanks to the 4 sturdy pivoting wheels, the bin can be moved with ease and the collected material can then be disposed of.

TECHNICAL DATA

MOTORE

Tipologie	Side channel blower
Potenza	7,5 kW - 10 HP
Frequenza	50/60 Hz
Voltaggio	400 V
Vuoto in continuo	260 mBar
Massima portata d'aria	730 m3/h
Classe di isolamento	55 F IP
Livello di rumorosità	74 dB(A)
Controllo Remoto	Free connector available

MACCHINA

Bocca aspirante	100 Ø mm
Sistema di raccolta	Steel container
Capacità	175 Lt
Dimensioni	850 x 1550 mm
Altezza	1980 mm
Peso	295 Kg
Valvola di sicurezza	Pressure relief valve
Supporto sollevamento muletto	Included

FILTRAZIONE

Tipologia filtro primario	4x Cartridges
Superficie filtrante	120000 cm2
Classe filtrazione EN 60335-2-69	M
Media	Antistatic polyester
Sistema Pulizia filtro	Automatic SP

DOTAZIONI



VACUUM GAUGE

Vacuum gauge for indication of filter clogged or in need of replacement



POWER SUPPLY CABLE



PLUG

4-pole industrial plug



WHEEL WITH BRAKE

Non-marking wheel with integrated brake



WHEELS

Non-marking pivoting wheels



STEEL CONSTRUCTION

Rugged industrial coated steel construction



CYCLONIC EFFECT

Tangential inlet and cyclone installed



PRV

Pressure relief valve installed



ELECTRICAL PANEL

Electrical panel, implementable with additional functions

OPTIONS
AVAILABLE FILTER CLEANING SYSTEMS

COM

Compressor on board
 Compressor fitted on the back cover

AVAILABLE FILTER MEDIA

HEPA 14

Absolute filter (EN 1822)
 110.000 cm² filter surface
 H14 Class Filter (EN 1822)
 Glass fiber


PTFE ANT

Antistatic PTFE filter (M class EN 60335-2-69)


PTFE

PTFE Filter (M class EN 60335-2-69)


NOMEX

250° Celsius resistant filter


MTF

Teflon filter (M class EN 60335-2-69)


ANT M

Antistatic filter (M class EN 60335-2-69)

STRUCTURE AND OPTIONS

60^{Hz}

60HZ
Available in 60Hz version



3 YEARS WARRANTY
Purchasing the replacement filter along with the vacuum



ATEX CERTIFICATION



CONTAINER EMPTYING KIT
System for easy container emptying using forklift lifting.



PANEL VENT FOR DIRECTIONAL EXPLOSION
An explosion vent designed to break at a specific pressure and release the explosive pressure in a safe area.
Panel vent for explosion



FLAMELESS VENT
A valve that contains the flame and the overpressure generated by a possible explosion.



GRD
Grounding



GFR
Lifting eyebolts



FKL
Forklift bracket



BX
Stainless steel bin AISI 304



GX
Stainless steel bin and chamber AISI 304



RC
Remote control 24V ON/OFF

ACCESSORIES



P12348
DRY KIT Ø 70MM
Kit containing specific accessories for 70 mm diameter dust and solids vacuuming