

VACUUM CLEANERS FOR SCRAP, PACKAGING AND OEM

AS 550

TRIMMINGS AND PRODUCTION WASTE VACUUM CLEANER



POTENZA
5,5 kW - 7,5 HP



APPLICAZIONE
Bulky scraps and cuttings




CAPACITA'
215Lt

VANTAGGI

- Suction of scraps and bulky cuttings
- Large collection capacity
- Can be installed directly on production lines
- Window to check fill level

HIGHLIGHTS

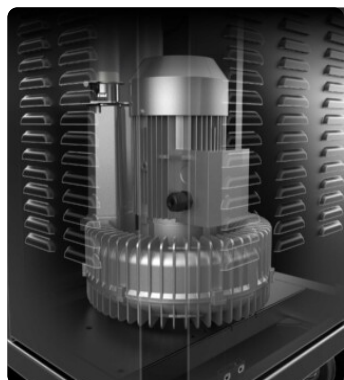

SUCTION UNIT

The suction unit is a side channel blower with direct coupling between motor and impeller. The turbine is equipped with a safety valve to ensure continuous, maintenance-free work. A metal silencer is included as standard in the turbine to ensure a low noise level.



FILTERING COLLECTION BAG

Polyester bag filter for material collection that compacts material to the bottom, thus enabling the suction of large amounts of material



COLLECTION UNIT

The material is collected inside the large chamber of the coated steel vacuum cleaner.



LEVEL INSPECTION DOOR

An inspection window allows inspection of the amount of material inside the container without having to open the top cover

TECHNICAL DATA

MOTORE

Tipologie	Side channel blower
Potenza	5,5 kW - 7,5 HP
Frequenza	50/60 Hz
Voltaggio	400 V
Vuoto in continuo	450 mBar
Massima portata d'aria	320 m3/h
Classe di isolamento	55 F IP
Livello di rumorosità	72 dB(A)

MACCHINA

Bocca aspirante	70 Ø mm
Sistema di raccolta	Steel container
Capacità	215 Lt
Dimensioni	680 x 1200 mm
Altezza	1370 mm
Peso	115 Kg
Valvola di sicurezza	Pressure relief valve

FILTRAZIONE

Tipologia filtro primario	Bag
Media	Polyester

DOTAZIONI



VACUUM GAUGE

Vacuum gauge for indication of filter clogged or in need of replacement



POWER SUPPLY CABLE



PLUG

4-pole industrial plug



WHEEL WITH BRAKE

Non-marking wheel with integrated brake



WHEELS

Non-marking pivoting wheels



STEEL CONSTRUCTION

Rugged industrial coated steel construction



PRV

Pressure relief valve installed

OPTIONS

STRUCTURE AND OPTIONS

60^{Hz}

60HZ

Available in 60Hz version



3 YEARS WARRANTY

Purchasing the replacement filter along with the vacuum



GRD

Grounding



BX

Stainless steel bin AISI 304