

VACUUM CLEANERS FOR SCRAP, PACKAGING AND OEM

# UPF 220

## INDUSTRIAL VACUUM FOR INTEGRATION INTO THE PRODUCTION LINE



**POTENZA**  
2,2 kW - 3 HP



**APPLICAZIONE**  
Powders, solids and  
shavings




**CAPACITA'**  
10Lt

## VANTAGGI

- Constant recovery of production waste or residual dust
- Available in horizontal and vertical construction
- Compact, for installation in narrow places
- Easy to maintain

## HIGHLIGHTS

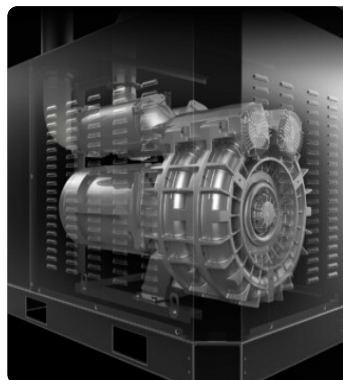


### SUCTION UNIT

The suction unit is a side channel blower with direct coupling between motor and impeller. The Side Channel Blower is equipped with a safety valve to ensure continuous, maintenance-free operation.



### FILTER UNIT

Filtration is provided by a Class M polyester bag filter (filtration efficiency 1 micron) with a high filtering surface area, which ensures air passage even with a dirty filter.

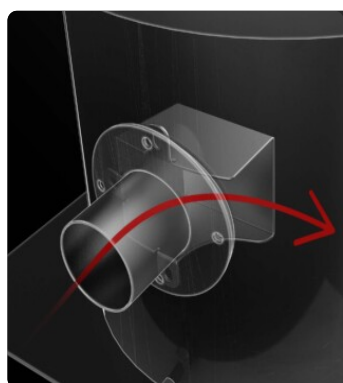

### INTERNAL DEFLECTOR

Sucked-in material is diverted by a deflector protecting the main filter.



### MODULARITY

The vacuum cleaner, designed to be installed in narrow or hard-to-reach places, is available in vertical or horizontal versions so as to adapt to different needs.

## TECHNICAL DATA

### MOTORE

Tipologie	Side channel blower
Potenza	2,2 kW - 3 HP
Frequenza	50/60 Hz
Voltaggio	400 V
Vuoto in continuo	210 mBar
Massima portata d'aria	320 m3/h
Classe di isolamento	55   F IP
Livello di rumorosità	64 dB(A)

### MACCHINA

Bocca aspirante	50 Ø mm
Sistema di raccolta	AISI304 stainless steel container
Capacità	10 Lt
Dimensioni	410 x 730 mm
Altezza	550 mm
Peso	42 Kg
Valvola di sicurezza	Pressure relief valve

### FILTRAZIONE

Tipologia filtro primario	Bag
Superficie filtrante	8000 cm2
Classe filtrazione EN 60335-2-69	M
Media	Polyester

## OPTIONS

### STRUCTURE AND OPTIONS

**60<sup>✓</sup>Hz**

**60HZ**

Available in 60Hz version



**3 YEARS WARRANTY**

Purchasing the replacement filter along with the vacuum