

VACUUM CLEANERS FOR SCRAP, PACKAGING AND OEM

UPF 085

INDUSTRIAL VACUUM FOR INTEGRATION INTO THE PRODUCTION LINE



POTENZA
0,85 kW - 1,2 HP



APPLICAZIONE
Powders, solids and
shavings




CAPACITA'
10Lt

VANTAGGI

- Constant recovery of production waste or residual dust
- Available in horizontal and vertical construction
- Compact, for installation in narrow places
- Easy to maintain

HIGHLIGHTS

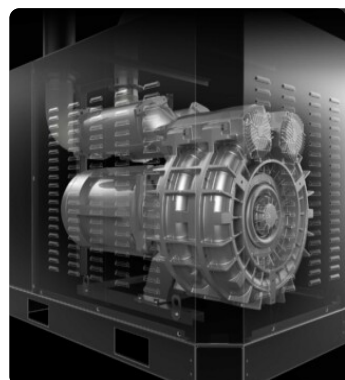


SUCTION UNIT

The suction unit is a side channel blower with direct coupling between motor and impeller. The Side Channel Blower is equipped with a safety valve to ensure continuous, maintenance-free operation.



FILTER UNIT

Filtration is provided by a Class M polyester bag filter (filtration efficiency 1 micron) with a high filtering surface area, which ensures air passage even with a dirty filter.

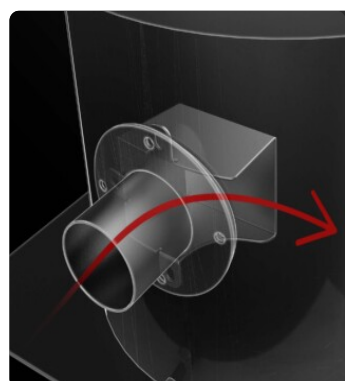

INTERNAL DEFLECTOR

Sucked-in material is diverted by a deflector protecting the main filter.



MODULARITY

The vacuum cleaner, designed to be installed in narrow or hard-to-reach places, is available in vertical or horizontal versions so as to adapt to different needs.

TECHNICAL DATA

MOTORE

Tipologie	Side channel blower
Potenza	0,85 kW - 1,2 HP
Frequenza	50/60 Hz
Voltaggio	400 V
Vuoto in continuo	160 mBar
Massima portata d'aria	150 m3/h
Classe di isolamento	55 F IP
Livello di rumorosità	64 dB(A)

MACCHINA

Bocca aspirante	50 Ø mm
Sistema di raccolta	AISI304 stainless steel container
Capacità	10 Lt
Dimensioni	410 x 730 mm
Altezza	350 mm
Peso	42 Kg
Valvola di sicurezza	Pressure relief valve

FILTRAZIONE

Tipologia filtro primario	Bag
Superficie filtrante	8000 cm2
Classe filtrazione EN 60335-2-69	M
Media	Polyester

OPTIONS

STRUCTURE AND OPTIONS

60[✓]Hz

60HZ

Available in 60Hz version



3 YEARS WARRANTY

Purchasing the replacement filter along with the vacuum