

ATEX AND ACD VACUUM CLEANERS

DF FIX 55 3GD

ATEX DUST COLLECTOR FOR CENTRALIZED VACUUM SYSTEMS



POTENZA
5,5 kW - 7,5 HP



APPLICAZIONE
Volatile and suspended
powders



CAPACITA'
175Lt

VANTAGGI


- Atex certified fan with very high air flow rate
- Easy to move with a forklift truck
- Ideal for installation in centralized systems
- Automatic filter cleaning using the PSC system

HIGHLIGHTS




SUCTION UNIT

The suction is generated by an electric fan specially designed to ensure the best air flow rate while maintaining a good level of water lift.

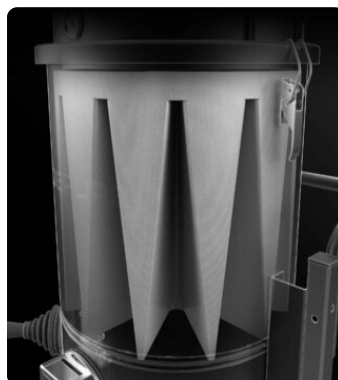

FILTER UNIT

Filtration is provided by a polyester star filter in class M (filtration efficiency 1 micron) with a high filtering surface area, which guarantees the passage of air even with a dirty filter.

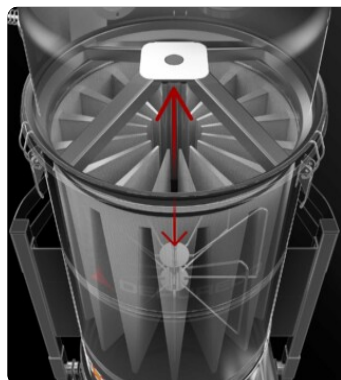

AUTOMATIC FILTER CLEANING PSC

Built-in filter cleaning system that automatically shakes the filter at regular and adjustable intervals, removing dust and debris from the surface.



COLLECTION UNIT

The material is collected inside an AISI 304 stainless steel container, complete with a metal handle that allows its release, to avoid any sparks that could be generated by the electrostatic charge.

TECHNICAL DATA

MOTORE

Tipologie	Electric Fan
Potenza	5,5 kW - 7,5 HP
Frequenza	50/60 Hz
Voltaggio	400 V
Vuoto in continuo	517 mBar
Livello depressione statica	480 mmH2O
Massima portata d'aria	2700 m3/h
Classe di isolamento	55 F IP
Livello di rumorosità	78 dB(A)
Quadro elettrico	Included

MACCHINA

Marcatura ATEX	II 3GD Ex htc IIIB T140°C Gc/Dc
Categoria EX	3GD
Temperatura di utilizzo	-10/+40 C°
Bocca aspirante	200 Ø mm
Sistema di raccolta	AISI304 stainless steel container
Capacità	175 Lt
Dimensioni	1670 x 850 mm
Altezza	1980 mm
Peso	220 Kg
Supporto sollevamento muletto	Included

FILTRAZIONE

Tipologia filtro primario	Star
Superficie filtrante	45000 cm2
Classe filtrazione EN 60335-2-69	M
Media	Antistatic polyester
Sistema Pulizia filtro	Automatic PSC

DOTAZIONI



ATEX CERTIFICATION



4-PIN ATEX INDUSTRIAL PLUG



ANTISTATIC FILTRATION

Antistatic filtration to discharge static energy



VACUUM GAUGE

Vacuum gauge for indication of filter clogged or in need of replacement



POWER SUPPLY CABLE



STEEL CONSTRUCTION

Rugged industrial coated steel construction



GRD

Grounding



BX

Stainless steel bin AISI 304



PSC

Semiautomatic pneumatic filter shaker

OPTIONS

AVAILABLE FILTER MEDIA



HEPA 14

Absolute filter (EN 1822)
110.000 cm² filter surface
H14 Class Filter (EN 1822)
Glass fiber



PTFE ANT

Antistatic PTFE filter (M class EN
60335-2-69)

AVAILABLE FILTER CLEANING SYSTEMS



SP

Automatic reverse jet cleaning system
Antistatic M class filter (EN 60335-2-69), 4
Polyester filter cartridges, 12 m² filter surface

STRUCTURE AND OPTIONS

60[✓]Hz

60Hz

Available in 60Hz version



3 YEARS WARRANTY

Purchasing the replacement filter along with the vacuum



GX

Stainless steel bin and chamber AISI 304



FLAMELESS VENT

A valve that contains the flame and the overpressure generated by a possible explosion.



PANEL VENT FOR DIRECTIONAL EXPLOSION

An explosion vent designed to break at a specific pressure and release the explosive pressure in a safe area.

Panel vent for explosion