

ATEX AND ACD VACUUM CLEANERS

# PUMA 10 SP 1/2D

## ATEX EXPLOSION-PROOF INDUSTRIAL VACUUM CLEANER



POTENZA  
7,5 kW - 10 HP



APPLICAZIONE  
Combustible dusts




CAPACITA'  
175Lt

## VANTAGGI

- Suitable and safe for intensive work in Atex 21 zones
- High efficiency antistatic filtration with integrated automatic cleaning system and grounding
- Maximum power thanks to the Atex certified blower
- Ideal for large centralized suction systems

## HIGHLIGHTS

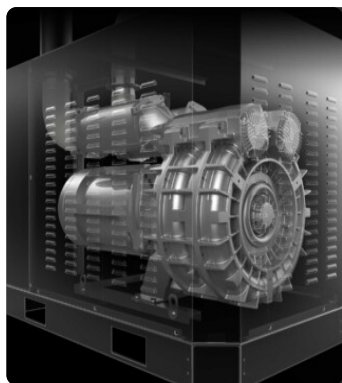

### SUCTION UNIT

The suction unit is a manufacturer-certified Atex side channel blower with direct coupling between motor and impeller. The Side Channel Blower is equipped with a safety valve that ensures continuous work, without any maintenance.



### FILTER UNIT

Filtration is ensured by polyester cartridge filters in class M (filtration efficiency 1 micron) with high filtering surface area, which guarantees the passage of air even with dirty filter.



### SP FILTER CLEANING SYSTEM

Automatic filter cleaning system in reverse flow of air at 6 bar (compressed air not supplied as standard). Each filter is cleaned at regular, alternately adjustable intervals without interrupting suction. Ideal for fine and difficult dust.



### COLLECTION UNIT

The material is collected inside an AISI 304 stainless steel container, complete with a metal handle that allows its release, to avoid any sparks that could be generated by the electrostatic charge.

## TECHNICAL DATA

### MOTORE

Tipologie	Atex side channel blower
Potenza	7,5 kW - 10 HP
Frequenza	50/60 Hz
Voltaggio	400 V
Vuoto in continuo	280 mBar
Massima portata d'aria	700 m3/h
Classe di isolamento	65   F IP
Livello di rumorosità	74 dB(A)

### MACCHINA

Marcatura ATEX	II 1/2D Ex htc IIIC T140°C Da/Dc
Categoria EX	1/2D
Temperatura di utilizzo	-10/+40 C°
Bocca aspirante	100 Ø mm
Sistema di raccolta	AISI304 stainless steel container
Capacità	175 Lt
Dimensioni	850 x 1550 mm
Altezza	1980 mm
Peso	295 Kg
Valvola di sicurezza	Pressure relief valve

### FILTRAZIONE

Tipologia filtro primario	4x Cartridges
Superficie filtrante	120000 cm2
Classe filtrazione EN 60335-2-69	M
Media	Antistatic polyester
Sistema Pulizia filtro	Automatic SP

DOTAZIONI



**THIRD PARTY ATEX CERTIFICATION**



**ELECTRICAL PANEL**

Electrical panel, implementable with additional functions



**4-PIN ATEX INDUSTRIAL PLUG**



**ANTISTATIC FILTRATION**

Antistatic filtration to discharge static energy



**VACUUM GAUGE**

Vacuum gauge for indication of filter clogged or in need of replacement



**POWER SUPPLY CABLE**



**WHEEL WITH BRAKE**

Non-marking wheel with integrated brake



**WHEELS**

Non-marking pivoting wheels



**STEEL CONSTRUCTION**

Rugged industrial coated steel construction



**CYCLONIC EFFECT**

Tangential inlet and cyclone installed



**PRV**

Pressure relief valve installed



**GRD**

Grounding



**BX**

Stainless steel bin AISI 304

## OPTIONS

### AVAILABLE FILTER CLEANING SYSTEMS



#### SP

Automatic reverse jet cleaning system  
 Antistatic M class filter (EN 60335-2-69), 4  
 Polyester filter cartridges, 12 m<sup>2</sup> filter surface

### AVAILABLE FILTER MEDIA



#### HEPA 14

Absolute filter (EN 1822)  
 110.000 cm<sup>2</sup> filter surface  
 H14 Class Filter (EN 1822)  
 Glass fiber



#### PTFE ANT

Antistatic PTFE filter (M class EN  
 60335-2-69)

## STRUCTURE AND OPTIONS

**60<sup>Hz</sup>**

### 60HZ

Available in 60Hz version



### 3 YEARS WARRANTY

Purchasing the replacement filter along with the vacuum



### CONTAINER EMPTYING KIT

System for easy container emptying using forklift lifting.



### FLAMELESS VENT

A valve that contains the flame and the overpressure generated by a possible explosion.



### PANEL VENT FOR DIRECTIONAL EXPLOSION

An explosion vent designed to break at a specific pressure and release the explosive pressure in a safe area.  
Panel vent for explosion



### FKL

Forklift bracket



### 6X

Stainless steel bin and chamber AISI 304