


ATEX AND ACD VACUUM CLEANERS

DV AIR 1100 3D

TELESCOPIC PRE-SEPARATOR FILTER WITH LOCALIZED DISCHARGE

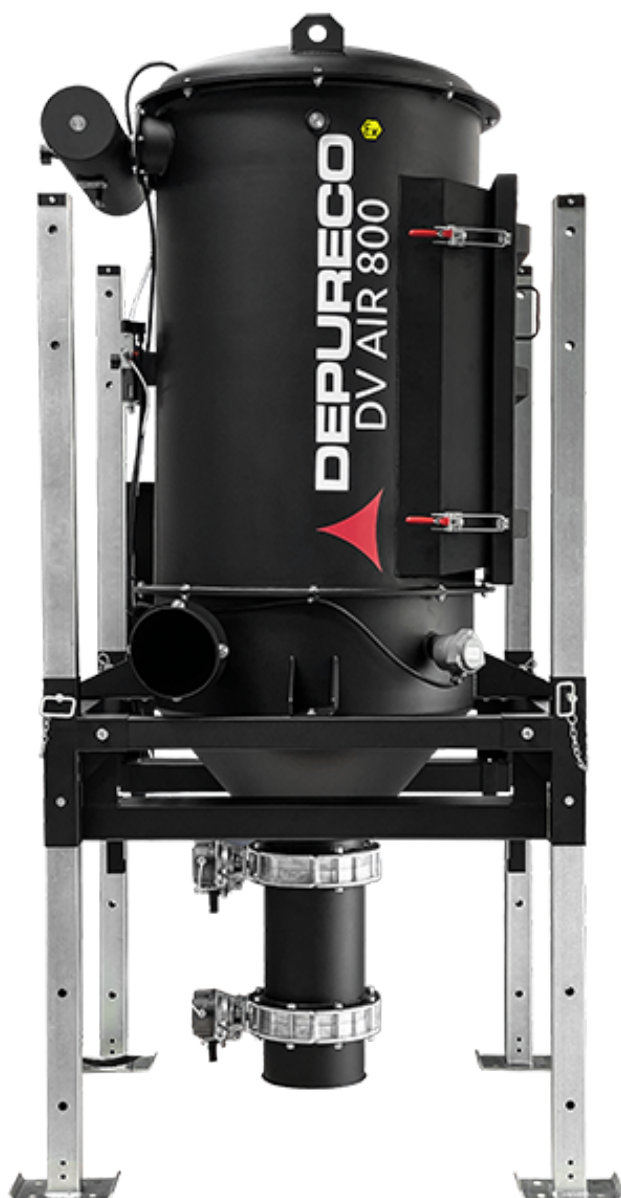

APPLICAZIONE
Powders, solids and
shavings




TIPO DI RACCOLTA
Localized discharge

VANTAGGI

- Very high filtration efficiency with automatic cleaning system
- Telescopic frame for easy handling
- Simple maintenance
- Multiple construction and material discharge options available

HIGHLIGHTS

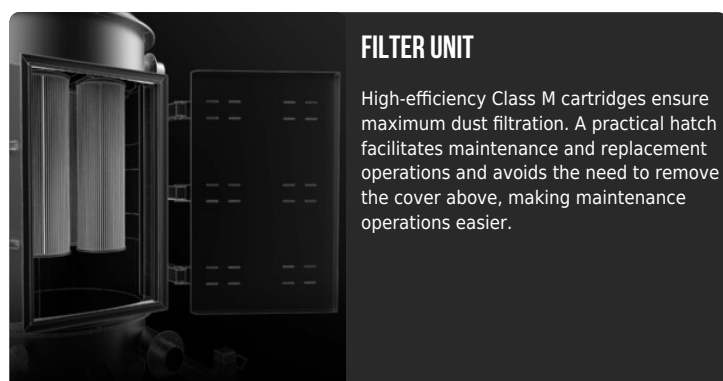


FILTER UNIT

High-efficiency Class M cartridges ensure maximum dust filtration. A practical hatch facilitates maintenance and replacement operations and avoids the need to remove the cover above, making maintenance operations easier.




SP FILTER CLEANING SYSTEM

Automatic filter cleaning system in reverse flow of air at 6 bar (compressed air not supplied as standard). Each filter is cleaned at regular, alternately adjustable intervals without interrupting suction. Ideal for fine and difficult dust.

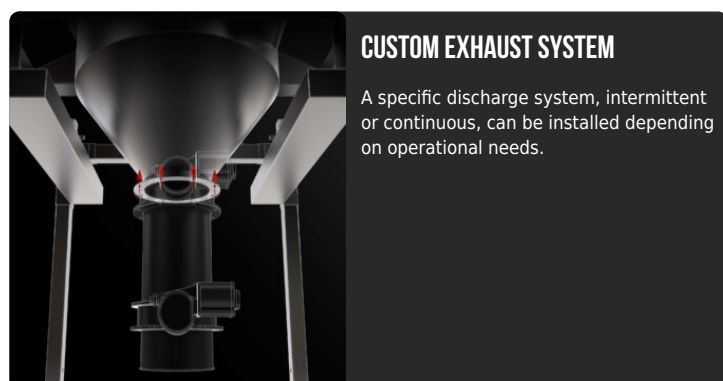

CUSTOM EXHAUST SYSTEM

A specific discharge system, intermittent or continuous, can be installed depending on operational needs.

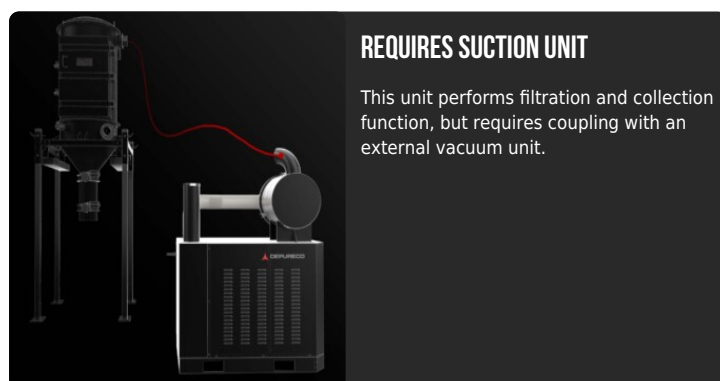

REQUIRES SUCTION UNIT

This unit performs filtration and collection function, but requires coupling with an external vacuum unit.

TECHNICAL DATA

MACCHINA

Marcatura ATEX	II 3D Ex htc IIIB T140°C Dc
Categoria EX	3D
Bocca aspirante in entrata	150
Bocca aspirante in uscita	150 Ø mm
Sistema di raccolta	Conveyed discharge
Dimensioni	1500 x 1500 mm
Altezza	4000 mm
Peso	528 Kg
Supporto sollevamento muletto	Included

FILTRAZIONE

Tipologia filtro primario	7x Cartridges
Superficie filtrante	595000 cm2
Classe filtrazione EN 60335-2-69	M
Media	Antistatic polyester
Sistema Pulizia filtro	Automatic SP

DOTAZIONI



ATEX CERTIFICATION




ELECTRICAL PANEL

Electrical panel, implementable with additional functions



STEEL CONSTRUCTION

Rugged industrial coated steel construction



STR

Four legs to discharge in big bag



COMPRESSED AIR SUPPLY VALVE

OPTIONS

STRUCTURE AND OPTIONS




3 YEARS WARRANTY

Purchasing the replacement filter along with the vacuum




DISCHARGE WITH COUNTERBALANCED FLAP

The material is automatically discharged every time suction is stopped.




DISCHARGE WITH BUTTERFLY VALVE

Manual intermittent discharging system with butterfly valve
Manual discharging butterfly valve




DOUBLE PNEUMATIC DISCHARGE WITH BUTTERFLY VALVES

System with valves that open alternately to allow the material to be discharged and the vacuum to be maintained at the same time.
Double electro pneumatic discharging butterfly valve ATEX



DOUBLE DISCHARGE WITH ELECTRO-PNEUMATIC DAMPERS

System with dampers that open alternately to allow the material to be discharged and the vacuum to be maintained at the same time.



ROTARY VALVE FOR CONTINUOUS DISCHARGE

The valve rotates continuously allowing a constant and uniform discharge of the aspirated material.
Rotary valve for continuous hopper discharge



ROTARY LEVEL SENSOR

Sensor with rotating paddle that sends a signal when the container is full to immediately stop suction




FLAMELESS VENT

A valve that contains the flame and the overpressure generated by a possible explosion.



PANEL VENT FOR DIRECTIONAL EXPLOSION

An explosion vent designed to break at a specific pressure and release the explosive pressure in a safe area.
Panel vent for explosion



NON-RETURN VALVE

Isolates explosion and prevents it from spreading from the industrial vacuum to the pipe