

ATEX AND ACD VACUUM CLEANERS

FOX 10 SP 1/2D

ATEX EXPLOSION-PROOF INDUSTRIAL VACUUM CLEANER



POTENZA
7,5 kW - 10 HP



APPLICAZIONE
Combustible dusts




CAPACITA'
100Lt

VANTAGGI

- Suitable and safe for intensive work in Atex 21 zones
- ATEX certified blower
- Third party certification of the inner chamber
- Progressive efficiency multistage anti-static filtration (up to H14) with integrated automatic cleaning system

HIGHLIGHTS

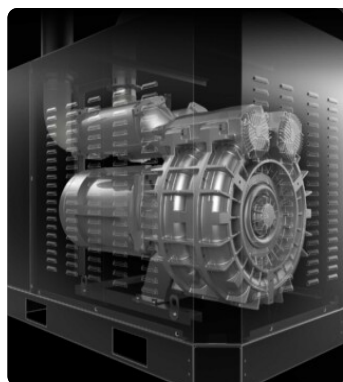


SUCTION UNIT

The suction unit is a manufacturer-certified Atex side channel blower with direct coupling between motor and impeller. The Side Channel Blower is equipped with a safety valve that ensures continuous work, without any maintenance.



FILTER UNIT

Filtration is ensured by polyester cartridge filters in class M (filtration efficiency 1 micron) with high filtering surface area, which guarantees the passage of air even with dirty filter.

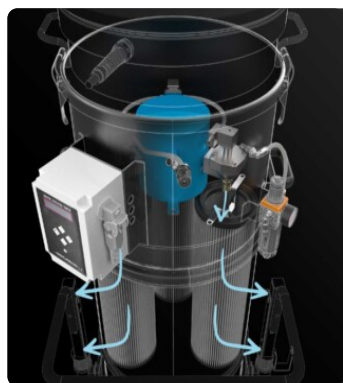

SP FILTER CLEANING SYSTEM

Automatic filter cleaning system in reverse flow of air at 6 bar (compressed air not supplied as standard). Each filter is cleaned at regular, adjustable intervals alternately without interrupting suction. Ideal for fine and difficult dust.



COLLECTION UNIT

The material is collected inside an AISI 304 stainless steel container, complete with a metal handle that allows its release, to avoid any sparks that could be generated by the electrostatic charge.

TECHNICAL DATA

MOTORE

Tipologie	Atex side channel blower
Potenza	7,5 kW - 10 HP
Frequenza	50/60 Hz
Voltaggio	400 V
Vuoto in continuo	280 mBar
Massima portata d'aria	550 m3/h
Classe di isolamento	65 F IP
Livello di rumorosità	74 dB(A)

MACCHINA

Marcatura ATEX	II 1/2D Ex htc IIIC T140°C Da/Dc
Categoria EX	1/2D
Temperatura di utilizzo	-10/+40 C°
Bocca aspirante	80 Ø mm
Sistema di raccolta	AISI304 stainless steel container
Capacità	100 Lt
Dimensioni	660 x 1200 mm
Altezza	1860 mm
Peso	242 Kg
Valvola di sicurezza	Pressure relief valve

FILTRAZIONE

Tipologia filtro primario	3x Cartridges
Superficie filtrante	90000 cm2
Classe filtrazione EN 60335-2-69	M
Media	Antistatic polyester
Sistema Pulizia filtro	Automatic SP

DOTAZIONI



THIRD PARTY ATEX CERTIFICATION



4-PIN ATEX INDUSTRIAL PLUG



ANTISTATIC FILTRATION

Antistatic filtration to discharge static energy



VACUUM GAUGE

Vacuum gauge for indication of filter clogged or in need of replacement



POWER SUPPLY CABLE



WHEEL WITH BRAKE

Non-marking wheel with integrated brake



WHEELS

Non-marking pivoting wheels



STEEL CONSTRUCTION

Rugged industrial coated steel construction



CYCLONIC EFFECT

Tangential inlet and cyclone installed



PRV

Pressure relief valve installed



GRD

Grounding



BX

Stainless steel bin AISI 304



HEPA 14

Absolute filter (EN 1822)

OPTIONS

STRUCTURE AND OPTIONS

60^{Hz}

60HZ
Available in 60Hz version



3 YEARS WARRANTY
Purchasing the replacement filter along with the vacuum



CONTAINER EMPTYING KIT
System for easy container emptying using forklift lifting.



SPARK TRAP
Built to capture sparks produced during welding, sanding, or polishing operations on metal parts



GX
Stainless steel bin and chamber AISI 304

ACCESSORIES



P12377
ANTISTATIC KIT PRO Ø 50MM
Kit containing antistatic accessories for application with 50 mm diameter ATEX vacuum cleaner



P13642
ANTISTATIC KIT PRO Ø 40MM
Kit containing antistatic accessories for application with 40 mm diameter ATEX vacuum cleaner



P12378
ANTISTATIC STARTER KIT Ø 50MM
Basic kit containing antistatic accessories for application with 50 mm diameter ATEX vacuum cleaner



P13641
ANTISTATIC STARTER KIT Ø 40MM
Basic kit containing antistatic accessories for application with 40 mm diameter ATEX vacuum cleaner