

ACCESSORIES

SFC 800

FILTER SEPARATOR WITH CONTAINER



APPLICAZIONE
Fine, dry and clogging
powders




CAPACITA'
175Lt

VANTAGGI

- Very high filtration efficiency
- Convenient detachable container for managing the vacuumed material

- Simple maintenance

HIGHLIGHTS

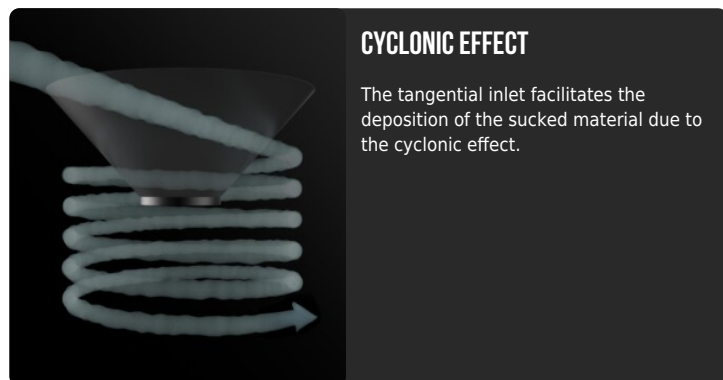

CYCLONIC EFFECT

The tangential inlet facilitates the deposition of the sucked material due to the cyclonic effect.




FILTER UNIT

Filtration is ensured by polyester cartridge filters in class M (filtration efficiency 1 micron) with high filtering surface area, which guarantees the passage of air even with dirty filter.



SP FILTER CLEANING SYSTEM

Automatic filter cleaning system in reverse flow of air at 6 bar (compressed air not supplied as standard). Each filter is cleaned at regular, alternately adjustable intervals without interrupting suction. Ideal for fine and difficult dust.

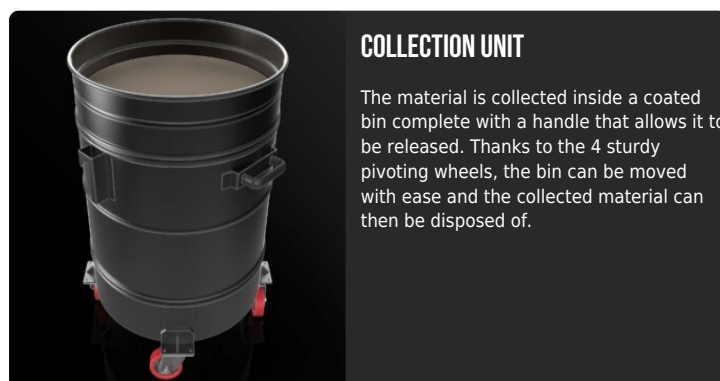

COLLECTION UNIT

The material is collected inside a coated bin complete with a handle that allows it to be released. Thanks to the 4 sturdy pivoting wheels, the bin can be moved with ease and the collected material can then be disposed of.

TECHNICAL DATA

MACCHINA

Bocca aspirante in entrata	100
Bocca aspirante in uscita	130 Ø mm
Sistema di raccolta	Steel container
Capacità	175 Lt
Dimensioni	800 X 800 mm
Altezza	2227 mm

FILTRAZIONE

Tipologia filtro primario	4x Cartridges
Superficie filtrante	110000 cm ²
Classe filtrazione EN 60335-2-69	M
Media	Antistatic polyester