

CYCLONIC HOPPER 200

CYCLONIC HOPPER WITH LOCALIZED DISCHARGE



APPLICAZIONE
Fine, dry and clogging
powders




TIPO DI RACCOLTA
Localized discharge

VANTAGGI

- Easily integrated
- Various material discharge systems available
- Suction with integrated cyclonic effect
- Effectively protects your suction and filtration system

HIGHLIGHTS

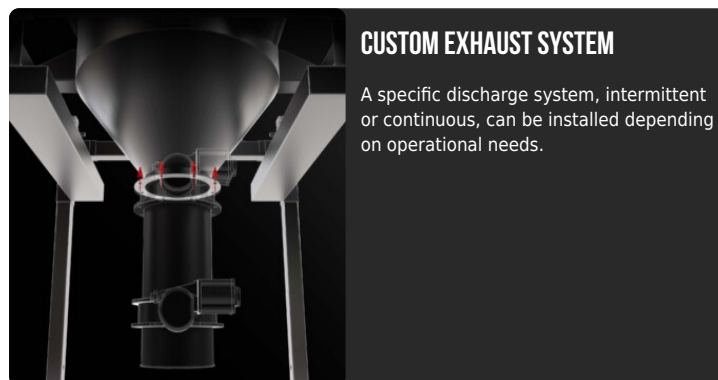


TECHNICAL DATA

MACCHINA

Bocca aspirante in entrata	100
Bocca aspirante in uscita	100 Ø mm
Sistema di raccolta	Conveyed discharge
Capacità	200 Lt
Dimensioni	570 x 570 mm
Altezza	1810 mm

OPTIONS

STRUCTURE AND OPTIONS




STR

Four legs to discharge in big bag



DISCHARGE WITH COUNTERBALANCED FLAP

The material is automatically discharged every time suction is stopped.




DISCHARGE WITH BUTTERFLY VALVE

Manual intermittent discharging system with butterfly valve
Manual discharging butterfly valve




DOUBLE PNEUMATIC DISCHARGE WITH BUTTERFLY VALVES

System with valves that open alternately to allow the material to be discharged and the vacuum to be maintained at the same time.
Double electro pneumatic discharging butterfly valve ATEX



DOUBLE DISCHARGE WITH ELECTRO-PNEUMATIC DAMPERS

System with dampers that open alternately to allow the material to be discharged and the vacuum to be maintained at the same time.



ROTARY VALVE FOR CONTINUOUS DISCHARGE

The valve rotates continuously allowing a constant and uniform discharge of the aspirated material.
Rotary valve for continuous hopper discharge



ROTARY LEVEL SENSOR

Sensor with rotating paddle that sends a signal when the container is full to immediately stop suction