

CENTRAL VACUUM SYSTEMS

CYCLONIC HOPPER 390

HOPPER FOR UNLOADING INTO A BIG-BAG



APPLICAZIONE
Powders, solids and
shavings





TIPO DI RACCOLTA
Localized discharge

VANTAGGI

- Direct unloading into big-bags
- Easy to transport and integrate into the production process
- Height adjustable with telescopic system

HIGHLIGHTS

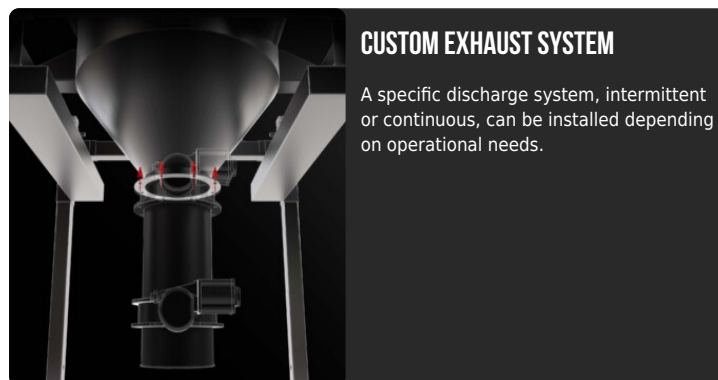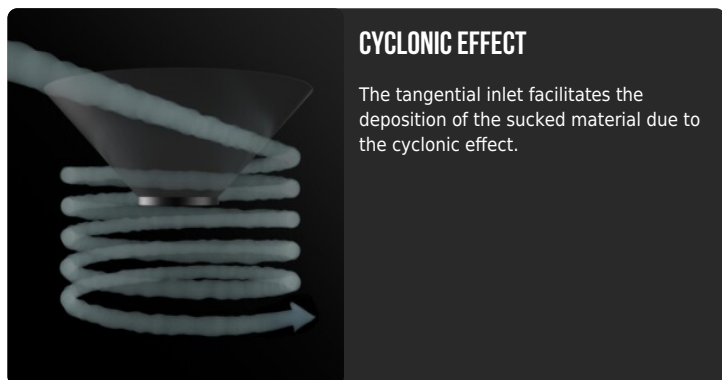


TECHNICAL DATA

MACCHINA

Bocca aspirante in entrata	130
Bocca aspirante in uscita	130 Ø mm
Sistema di raccolta	Conveyed discharge
Capacità	390 Lt
Dimensioni	1360 x 1275 mm
Altezza	3435 mm
Supporto sollevamento muletto	Included

DOTAZIONI

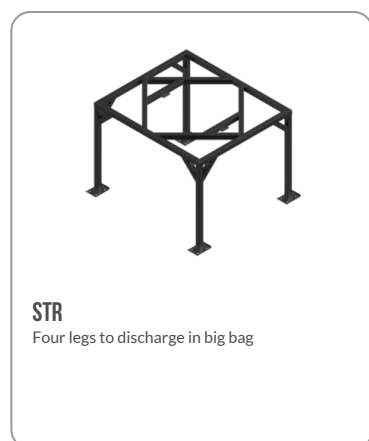

OPTIONS

STRUCTURE AND OPTIONS




DISCHARGE WITH COUNTERBALANCED FLAP

The material is automatically discharged every time suction is stopped.




DISCHARGE WITH BUTTERFLY VALVE

Manual intermittent discharging system with butterfly valve
Manual discharging butterfly valve




DOUBLE PNEUMATIC DISCHARGE WITH BUTTERFLY VALVES

System with valves that open alternately to allow the material to be discharged and the vacuum to be maintained at the same time.
Double electro pneumatic discharging butterfly valve ATEX



DOUBLE DISCHARGE WITH ELECTRO-PNEUMATIC DAMPERS

System with dampers that open alternately to allow the material to be discharged and the vacuum to be maintained at the same time.



ROTARY VALVE FOR CONTINUOUS DISCHARGE

The valve rotates continuously allowing a constant and uniform discharge of the aspirated material.
Rotary valve for continuous hopper discharge



ROTARY LEVEL SENSOR

Sensor with rotating paddle that sends a signal when the container is full to immediately stop suction